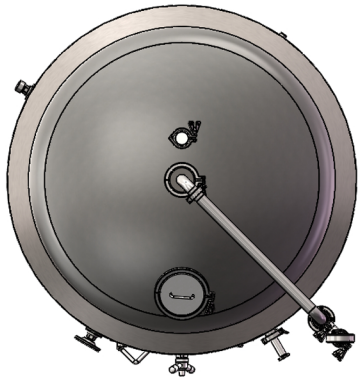

CAROLINA

CAROLINA BREWTECH LLC

STANDARD FEATURES:

- Butterfly valves, Sample valve, PVRV, Pressure gauge，Thermowell, Thermometer
- 3 stainless steel legs with stainless leveling footpads
- Inner shell: 304 stainless steel, thickness 0.12"
- Outer shell: 304 stainless steel, thickness 0.08" (Exterior brushed)
- Interior and exterior finish polished to a sanitary finish
- Interior finish pickled and passivated
- Fully welded exterior shell
- 60 degree cone bottom
- Rotating beer outlet port
- Top manway
- Dual zone dimple cooling jackets
- 3" Polyurethane insulation
- CIP arm and spray ball
- Sanitary tri-clamp connections

Fermentation tank - 2

Size	D	H	Full Volume
5BBL	1060mm [41.73in]	2100mm [82.67in]	6.26BBL [735L]
7BBL	1110mm [43.70in]	2515mm [99.01in]	8.52BBL [1000L]
10BBL	1260mm [49.01in]	2550mm [100.39in]	12.10BBL [1420L]
15BBL	1460mm [57.48in]	2940mm [115.74in]	20.19BBL [2370L]
20BBL	1610mm [63.39in]	3270mm [128.74in]	25.98BBL [3050L]
500L	1060mm [41.73in]	1946mm [76.61in]	5.41BBL [635L]
1000L	1210mm [47.64in]	2573mm [101.30in]	10.73BBL [1260L]
2000L	1510mm [59.45in]	3146mm [123.86in]	21.89BBL [2570L]

https://www.carolinamicrobrewing.com

Tel: (410) 971-8326

Email: sales@carolinabeers.com

Address: Unit 505, Curtis Business Ctr 3 - 709 East Ordnance Road, Baltimore, MD 21226